



Date _____

Contact _____

Revision _____

Brand _____

Assembler _____

Bike Model _____

Model Year _____

Base Tune

VOLUME SPACERS: L S RECOMMENDED SAG

HSC [HIGH SPEED COMPRESSION]



LSC [LOW SPEED COMPRESSION]



HSR [HIGH SPEED REBOUND]



LSR [LOW SPEED REBOUND]



Hardware: Valve Body

Width _____ mm

Bolt _____ mm

Shock Type

DBAir [IL]

Shock Length

_____ mm

Shock Travel

_____ mm

Hardware: End Eye


Width _____ mm

Bolt _____ mm

Air Valve Position (Please Select)

Previous DBInLine fitment on the air can side may be affected due to the increased circumference of the DB AIR [IL] air can and a different orientation of the air valve. Consult air can orientation with your Cane Creek sales representative.

11 o'clock position is the Cane Creek recommended orientation.

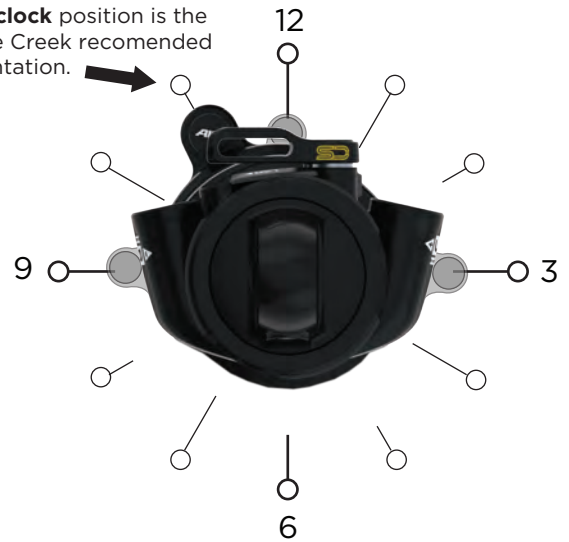

OPT Climb Switch Remote Orientation

Please select one (Optional)

Top Mount:

Bottom Mount:



Additional Notes

Approved By _____

[Signature]

Date _____

Base Tune Card Part Number: _____

Cane Creek Information Only: Shock Part Number _____