



Date February 24, 2013

Contact _____

Revision _____

Brand Intense

Assembler Intense

Bike Model Carbine

Model Year 2014

Base Tune

VOLUME SPACERS L 0 S 0 RECOMMENDED SAG 17mm

HSC [HIGH SPEED COMPRESSION]

2 **PLUSH** 0 TURNS TURNS 4 **RESISTS BOTTOMING**

LSC - CS [LOW SPEED COMPRESSION]

3 **SUPPLE** 0 CLICKS CLICKS 25 **PEDAL EFFICIENCY**

HSR [HIGH SPEED REBOUND]

2 **LIVELY POP** 0 TURNS TURNS 4 **G-OUT CONTROL**

LSR - CS [LOW SPEED REBOUND]

4 **PLUSH** 0 CLICKS CLICKS 25 **FIRM**

Shock Type

DBAIR CS

Shock Length

200 mm

Shock Travel

*55 mm

Spring Rate


_____ lb

Hardware: Cylinder Head

Width 21.8 mm

Bolt 6 mm

DBAIR Valve Position (please select)

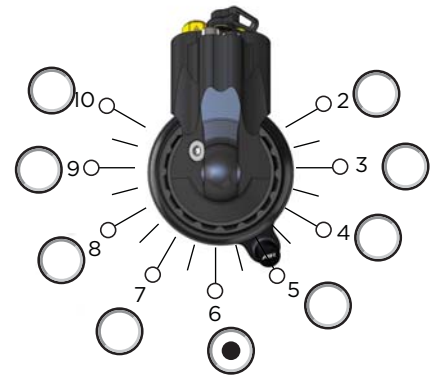

Hardware: End Eye

Width 30 mm

Bolt 6 mm

Additional Notes

*travel reduced to accommodate frame fitment.

CSC = 7

CSR = 7

Approved By _____

Date 2/24/13